

WTF SERIES | TIME CLOCK ACID NEUTRALIZERS




BENEFITS

- *Increases pH level of water to a safe limit*
- *Protects copper plumbing systems and helps eliminate pinhole leaks*
- *Eliminates blue or green stains on fixtures*
- *Prevents scratching and pitting of porcelain and cookware*



WTF SERIES | TIME CLOCK ACID NEUTRALIZERS

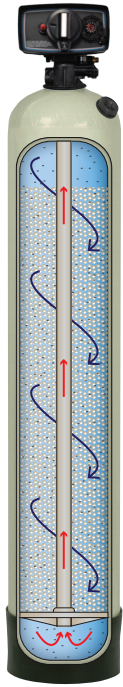

FEATURES

- Fiberglass tank will not rust, durable design and efficient operation
- 12 Day Fleck 5600 Valve
- High flow bypass valve included
- Dome hole fill port
- Warranty
Fiberglass Tank: 10 years
Control Valve: 3 years
Timer/Motor: 3 years

PH LEVELS

7.0	Neutral
6.8 - 6.9	Slightly Acidic
6.0 - 6.7	Moderately Acidic
4.0 - 5.9	Extremely Acidic

Recommended range: 7.0 - 8.5

Low pH causes blue or green stains and corrosion of plumbing fixtures. It can also cause pitting of porcelain and enamel fixtures and dishes.

Add filter media about every 3 to 6 months

MEDIA OPTIONS (Sold separately)


Extra Fine Calcite



80% Calcite
20% Mag Oxide



Fine Calcite



70% Calcite
30% Mag Oxide



Medium Calcite



60% Calcite
40% Mag Oxide



Magnesium Oxide

+



50% Calcite
50% Mag Oxide



WTF10ANX-V
WTF15ANX-V
WTF25ANX-V

VORTECH PLATE



Environmentally friendly, reduces backwash requirement by up to 30%.

Designed for over 6,500 lbs. load capacity.

High flow design maximizes today's high efficiency control valve technology.

FLECK 5600 VALVE



1-12 day time clock valve, simple to adjust and easy to service with quick access to all internal components.

Stainless steel bypass valve.

Regenerates at pre-set intervals.

SPECIFICATIONS

Model	Capacity Cu. Ft.	Tank Size Inches	Service/Peak Flow Rate	Backwash Flow Rate	Gal. Per Backwash	Pipe Size In/Out	pH Range	50 lb bags of Media needed
WTF10ANX-V	1.0	10" x 40"	5 gpm	5.0 gpm	200	1"	5 - 6.9	2 bags
WTF15ANX-V	1.5	10" x 54"	5/6 gpm	5.0 gpm	200	1"	5 - 6.9	3 bags
WTF25ANX-V	2.5	13" x 54"	7/9 gpm	7.0 gpm	280	1"	5 - 6.9	5 bags